


| 4 | | | | 3 | | 2 | | 1 | | | |
|------|------------|-----|--|------------------|------------------|-----|----------------------------|------|-----|------|---------|
| ITEM | CLARKE P/N | QTY | DESCRIPTION | MFG. P/N | MFG. | REV | DESCRIPTION | ECN# | DWN | APVD | DATE |
| 1 | G061081 | 1 | 2in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | | PHILLIPS & TEMRO | A | ISSUED ENGINEERING DRAWING | 2595 | DMP | KRW | 24FEB12 |
| 2 | G061082 | 1 | 2.5in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | | PHILLIPS & TEMRO | | | | | | |
| 3 | G061083 | 1 | 3in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | JCS-03X-90014426 | PHILLIPS & TEMRO | | | | | | |
| 4 | G061084 | 1 | 4in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | JCS-04X-90014469 | PHILLIPS & TEMRO | | | | | | |
| 5 | G061085 | 1 | 5in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | JCS-05X-90014484 | PHILLIPS & TEMRO | | | | | | |
| 6 | G061086 | 1 | 6in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | JCS-06X-90014432 | PHILLIPS & TEMRO | | | | | | |
| 7 | G061087 | 1 | 8in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | | PHILLIPS & TEMRO | | | | | | |
| 8 | G061088 | 1 | 10in TUBE CONNECTION INLET & OUTLET, INSULATED JCS SILENCER | | PHILLIPS & TEMRO | | | | | | |
| 9 | G061089 | 1 | | | | | | | | | |
| 10 | G061090 | 1 | | | | | | | | | |

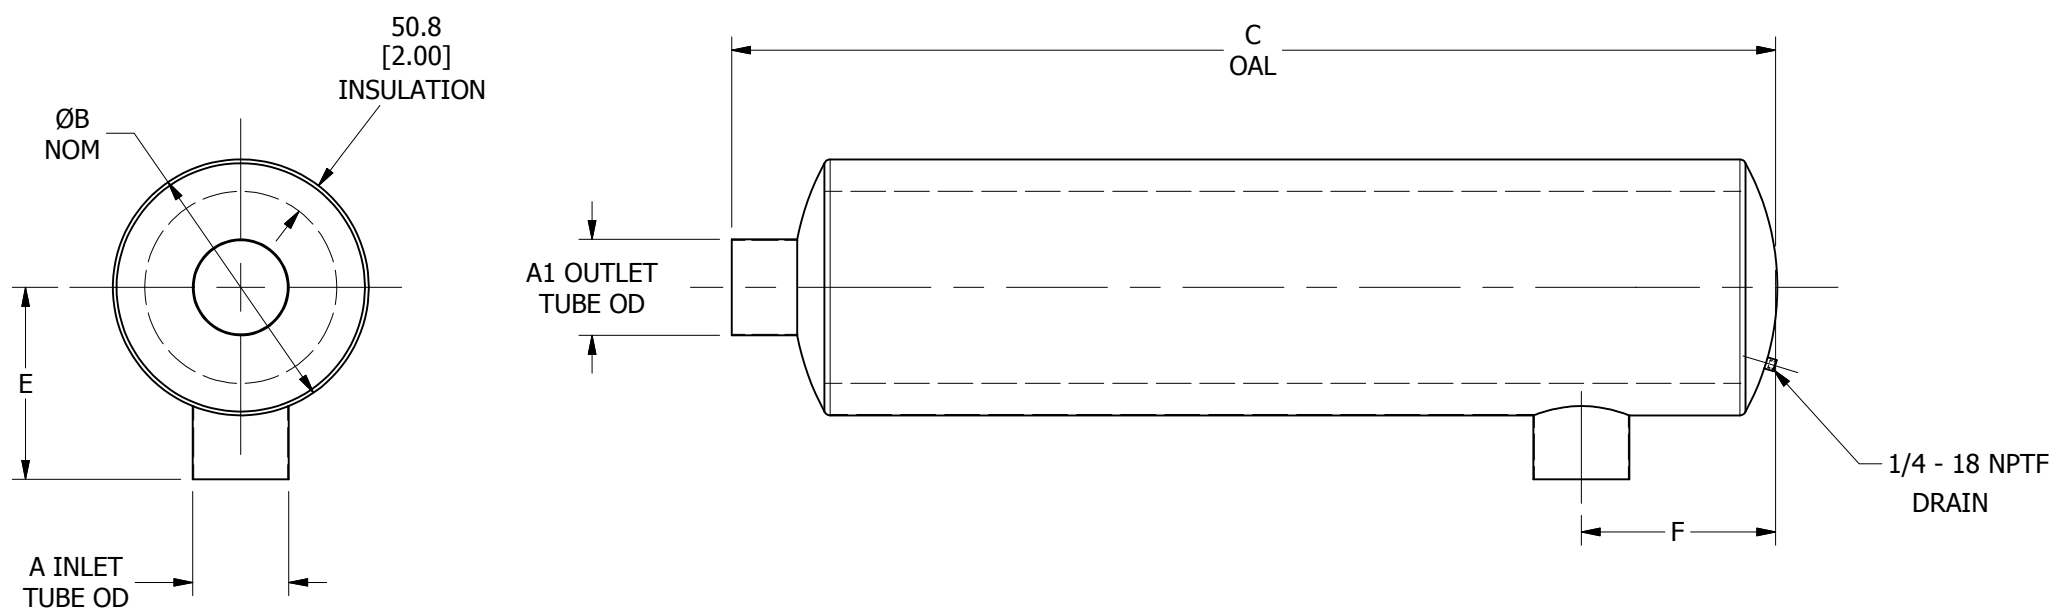

| CRITICAL GRADE INSULATED SILENCERS | | | | | | | |
|------------------------------------|----------|--------------|--------------|--------------|----------------|--------------|---------------|
| CLARKE P/N | SIZE | A | A1 | B | C | E | F |
| G061081 | 2 INCH | 50.8 [2.0] | 50.8 [2.0] | 254.0 [10.0] | 1009.7 [39.75] | 190.5 [7.5] | 184.2 [7.25] |
| G061082 | 2.5 INCH | 63.5 [2.5] | 63.5 [2.5] | 304.8 [12.0] | 1012.9 [39.88] | 215.9 [8.5] | 187.5 [7.38] |
| G061083 | 3 INCH | 76.2 [3.0] | 76.2 [3.0] | 304.8 [12.0] | 1032.0 [40.63] | 228.6 [9.0] | 187.5 [7.38] |
| G061084 | 4 INCH | 101.6 [4.0] | 101.6 [4.0] | 355.6 [14.0] | 1358.9 [53.50] | 266.7 [10.5] | 234.9 [9.25] |
| G061085 | 5 INCH | 127.0 [5.0] | 127.0 [5.0] | 406.4 [16.0] | 1659.9 [65.35] | 304.8 [12.0] | 311.2 [12.25] |
| G061086 | 6 INCH | 152.4 [6.0] | 152.4 [6.0] | 406.4 [16.0] | 1659.9 [65.35] | 304.8 [12.0] | 311.2 [12.25] |
| G061087 | 8 INCH | 203.2 [8.0] | 203.2 [8.0] | 558.8 [22.0] | 2298.7 [90.50] | 381.0 [15.0] | 419.1 [16.5] |
| G061088 | 10 INCH | 254.0 [10.0] | 254.0 [10.0] | 660.4 [26.0] | 2667.0 [105.0] | 431.8 [17.0] | 508.0 [20.0] |
| G061089 | | | | | | | |
| G061090 | | | | | | | |

| | | | |
|---|--|--|--|
| <small>THIS DRAWING AND THE INFORMATION HEREON ARE OUR PROPERTY AND MAY BE USED BY OTHERS ONLY AS AUTHORIZED BY U.S. UNPUBLISHED-ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS</small> | | <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO CONTROLLED DRAWING | |
| MACHINE TOLERANCE DECIMAL mm inch X. ± 1.5 ± 0.06 X.X ± 0.8 ± 0.03 X.XX ± 0.3 ± 0.01 X.XXX ± 0.025 ± 0.001 X.XXXX ± 0.001 ANGULAR: ± 0.5° | | DRWN DPOTTER DATE 2/24/2012 ENGR AHIGGINS | NAME SILENCER, CRITICAL GRADE INSULATED, SIDE IN - END OUT TUBE CONNECTION |
| FABRICATION TOLERANCE DECIMAL mm inch X. ± 3 X.X ± 1.5 ± 0.12 X.XX ± 0.75 ± 0.06 ANGULAR: ± 1.0° | | MATERIAL Welded Steel Mild | PART NO. G061081-1090 |
| ASSEMBLY GENSET | | SCALE NTS UNITS MM [INCH] | REV B |