


ITEM	CLARKE P/N	QTY	DESCRIPTION	MFG. P/N	MFG.	2		1			
						REV	DESCRIPTION	ECN#	DWN	APVD	DATE
1	G061102	1	2in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO	A	ISSUED ENGINEERING DRAWING	2592	DGP	KRW	05MAR12
2	G061103	1	2.5in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
3	G061104	1	3in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
4	G061105	1	4in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
5	G061106	1	5in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
6	G061107	1	6in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
7	G061108	1	8in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
8	G061109	1	10in TUBE CONNECTION INLET & OUTLET, INSULATED JIS SILENCER		PHILLIPS & TEMRO						
9	G061110	1									
10	G061111	1									

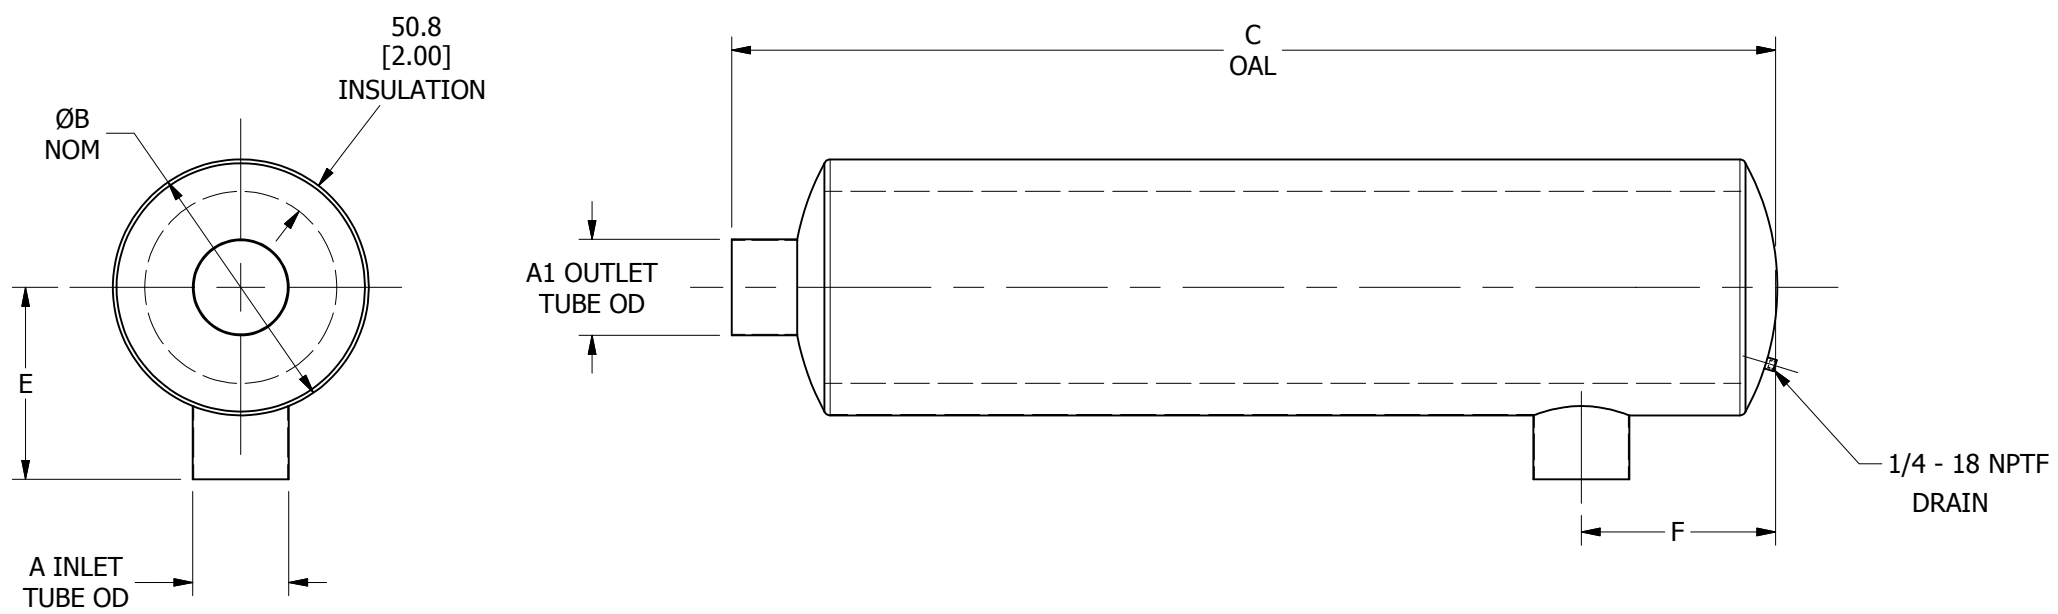

INDUSTRIAL GRADE INSULATED SILENCERS							
CLARKE P/N	SIZE	A	A1	B	C	E	F
G061102	2 INCH	50.8 [2.0]	50.8 [2.0]	254.0 [10.0]	558.8 [22.0]	190.5 [7.5]	76.2 [3.00]
G061103	2.5 INCH	63.5 [2.5]	63.5 [2.5]	304.8 [12.0]	558.8 [22.0]	215.9 [8.5]	96.98 [3.70]
G061104	3 INCH	76.2 [3.0]	76.2 [3.0]	304.8 [12.0]	558.8 [22.0]	228.6 [9.0]	106.7 [4.20]
G061105	4 INCH	101.6 [4.0]	101.6 [4.0]	355.6 [14.0]	749.3 [29.5]	266.7 [10.5]	139.7 [5.50]
G061106	5 INCH	127.0 [5.0]	127.0 [5.0]	406.4 [16.0]	1056.6 [41.6]	304.8 [12.0]	193.0 [7.60]
G061107	6 INCH	152.4 [6.0]	152.4 [6.0]	406.4 [16.0]	1056.6 [41.6]	304.8 [12.0]	193.0 [7.60]
G061108	8 INCH	203.2 [8.0]	203.2 [8.0]	558.8 [22.0]	1384.3 [54.5]	381.0 [15.0]	266.7 [10.5]
G061109	10 INCH	254.0 [10.0]	254.0 [10.0]	660.4 [26.0]	1752.6 [69.0]	431.8 [17.0]	381.0 [15.0]
G061110							
G061111							

<small>THIS DRAWING AND THE INFORMATION HEREON ARE OUR PROPERTY AND MAY BE USED BY OTHERS ONLY AS AUTHORIZED BY U.S. UNPUBLISHED-ALL RIGHTS RESERVED UNDER THE COPYRIGHT LAWS</small>		<input type="checkbox"/> YES <input checked="" type="checkbox"/> NO CONTROLLED DRAWING	
MACHINE TOLERANCE DECIMAL mm inch X. ± 1.5 ± 0.06 X.X ± 0.8 ± 0.03 X.XX ± 0.3 ± 0.01 X.XXX ± 0.025 ± 0.01 X.XXXX ± 0.001 ± 0.001 ANGULAR: ± 0.5°		DRWN DPOTTKOTTER DATE 3/5/2012 ENGR AHIGGINS	NAME <b>SILENCER, INDUSTRIAL GRADE INSULATED, SIDE IN - END OUT TUBE CONNECTION</b>
FABRICATION TOLERANCE DECIMAL mm inch X. ± 3 ± 0.12 X.X ± 1.5 ± 0.08 X.XX ± 0.75 ± 0.06 ANGULAR: ± 1.0°		MATERIAL Welded Steel Mild	PART NO. <b>G061102-1111</b>
ASSEMBLY GENSET		SCALE NTS	UNITS MM [INCH]
		PAGE 1 OF 1	REV <b>A</b>